

## **Alteo®**

Widespread Bathroom Faucet K-45102-4



### Features:

- Two lever handles allow for both volume and temperature control.
- Includes metal pop-up drain with 1-1/4" tailpiece.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- 4-1/2" (114 mm) spout reach.
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Quick-Connect hose connections make widespread faucet installation a snap.
- Handles pre-assembled on KOHLER Ultraglide™ Ceramic Disc Valves to simplify installation.
- Coordinates with Alteo® faucets, accessories, and showering components to complete your bathroom.

### Material:

- Premium metal construction for durability and reliability.
- KOHLER® finishes resist corrosion and tarnishing.

### Installation:

• For 8" - 16" (203 - 406 mm) centers.



## **Available Finishes:**

CP - Polished Chrome BN - Vibrant® Brushed Nickel





ADA CSA B651 OBC

### Codes / Standards:

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations EPA WaterSense® California Energy Commission (CEC) DOE - Energy Policy Act 1992 ICC/ANSI A117.1







# Alteo® Widespread Bathroom Faucet K-45102-4

## **KOHLER® Faucet Limited Warranty**

See website for detailed warranty information.


### **Faucet Technical Information:**

Flow rate: 1.2 gal/min (4.5 l/min) Pressure: 60 psi (4.1 bar) Drain included: Yes

Drain tailpiece included: Yes

### Notes:

Install this product according to the installation instructions. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

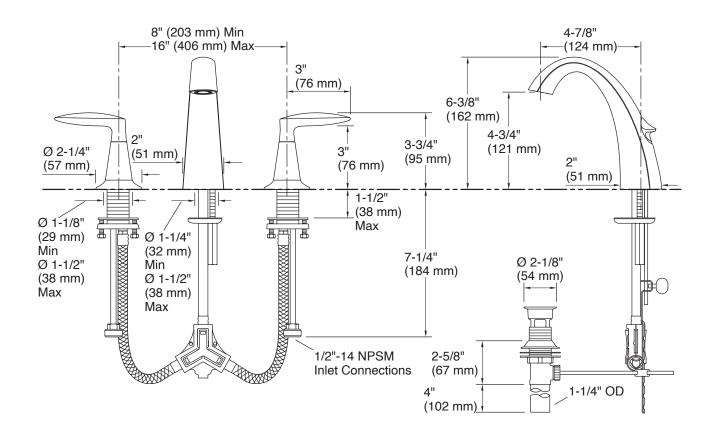



### WASHINGTON

9805 32nd Ave S Lakewood, Washington U.S.A. 98499

For more information, visit us at www.4willis.com or e-mail us at info@4willis.com.