

Alteo®

Widespread Bathroom Faucet K-45102-4



Features:

- Two lever handles allow for both volume and temperature control.
- Includes metal pop-up drain with 1-1/4" tailpiece.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- 4-1/2" (114 mm) spout reach.
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Quick-Connect hose connections make widespread faucet installation a snap.
- Handles pre-assembled on KOHLER Ultraglide™ Ceramic Disc Valves to simplify installation.
- Coordinates with Alteo® faucets, accessories, and showering components to complete your bathroom.

Material:

- Premium metal construction for durability and reliability.
- KOHLER® finishes resist corrosion and tarnishing.

Installation:

• For 8" - 16" (203 - 406 mm) centers.



Available Finishes:

CP - Polished Chrome BN - Vibrant® Brushed Nickel






ADA CSA B651 OBC

Codes / Standards:

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations EPA WaterSense® California Energy Commission (CEC) DOE - Energy Policy Act 1992 ICC/ANSI A117.1





ALBERTA 7151 44 Street SE. Calgary, Alberta Canada T2C 4E8



Alteo® Widespread Bathroom Faucet K-45102-4

KOHLER® Faucet Limited Warranty

See website for detailed warranty information.


Faucet Technical Information:

Flow rate: 1.2 gal/min (4.5 l/min) Pressure: 60 psi (4.1 bar) Drain included: Yes

Drain tailpiece included: Yes

Notes:

Install this product according to the installation instructions. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

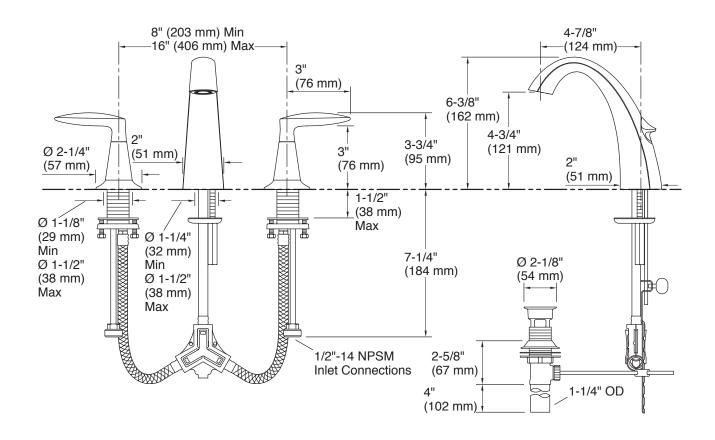



ONTARIO (Head Office) 1149 Pioneer Road Burlington, Ontario Canada L7M 1K5 ALBERTA 7151 44 Street SE. Calgary, Alberta Canada T2C 4E8

For more information, visit us at www.4willis.com or e-mail us at info@4willis.com.