

# **Crue**<sup>™</sup>

# Pull-down Kitchen Sink Faucet K-22972



#### Features:

- Three-function pull-down sprayhead with touch control allows you to switch between aerated stream, ring spray and Boost technology.
- Boost technology increases the flow rate by 30% with the press of a button. Use Boost with stream for faster filling or with ring spray for more powerful cleaning.
- DockNetik® magnetic docking system securely locks the spray-head into place when not in use.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down spray-head easier and more comfortable to use.
- MasterClean<sup>™</sup> spray-face features an easy-to-clean surface that withstands mineral build-up.
- High-arch spout offers superior clearance for filling pots and cleaning.
- Single handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.5 gpm maximum flow rate at 60 psi.

#### Material:

- Premium metal construction for durability and reliability.
- KOHLER® finishes resist corrosion and tarnishing.

#### Installation:

- For single-hole or three-hole installation (escutcheon plate included)
- Flexible supply lines and installation ring simplify installation.

#### **Optional Products / Accessories**

- K-77687 single replacement filter cartridge
- K-77688 Replacement Filter Cartridges, Two-Pack

#### Adapters, Rough-in and Extension Kits

• 1012715 Range: 1-3/8" - 3-3/8"



#### **Available Finishes:**

CP - Polished Chrome

BL - Matte Black





ADA 0

**CSA B651** 

#### Codes / Standards:

ASME A112.18.1/CSA B125.1 NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651





## Crue™ Pull-down Kitchen Sink Faucet K-22972

### **KOHLER® Faucet Limited Warranty**

See website for detailed warranty information.

#### **Faucet Technical Information:**

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

Valve body: Plasticl/min)

Min static pressure: 20 psi (137.9 kPa)


Max static pressure: 125 psi (861.8 kPa)

Fixture pressure max (static):

125 psi (861.8 kPa)

#### Notes:

Install this product according to the installation instructions. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

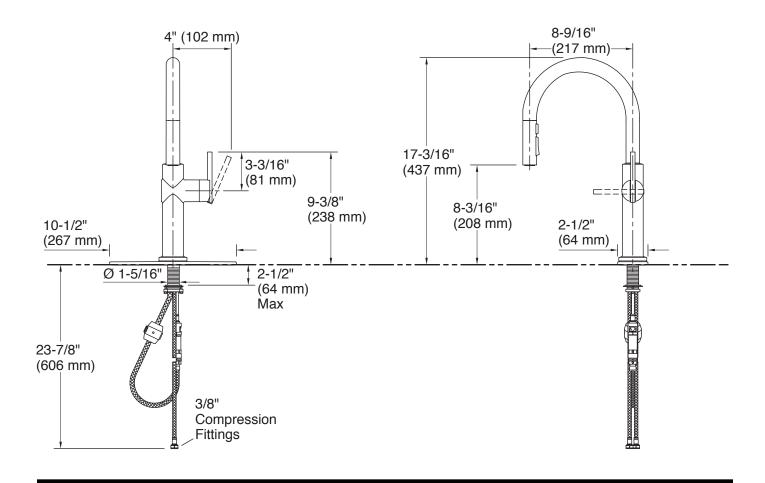



ONTARIO (Head Office) 1149 Pioneer Road Burlington, Ontario Canada L7M 1K5 ALBERTA 7151 44 Street SE. Calgary, Alberta Canada T2C 4E8

For more information, visit us at www.4willis.com or e-mail us at info@4willis.com.